


**Accessories**  
**BOS S-F01**  
**Signaladapter**



PXI583

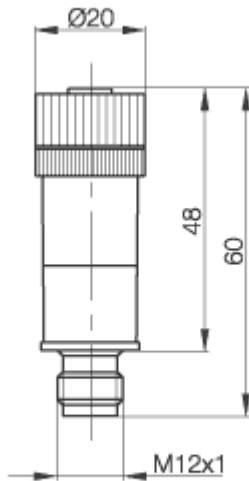

Approvals  
**CE**

If not differently indicated,  
 all values by IEC 947-5-2 (DIN EN60947-5-2)  
 Specifications subject to change

Balluff GmbH  
 Postfach 1160  
 73761 Neuhausen  
 Telefon (07158) 173-0  
 Telefax (07158) 5010

**Common Data**

Application	for sensors series 12
function display	LED red
Ambient temperature range	0...60
On/Off delay	0,1 ms
Input/ Output	PNP / NPN
Input resistance	> 10 kOhm
Input connection	M12 female, 4-pin
Output connection	M12 male, 4-pin

**Mechanical Data**

Measurements BxHxT or DxT	mm	Ø20 x 60
Housing material		PBT/PA 6.6
Weight	g	15
Degree of protection	IP	67

**Electrical Data**

Supply voltage		10...30 DC
Rated operational current	mA	< 400
No-load supply current	mA	≤ 10
Short circuit protection		yes
Protected against polarity rev		yes

20.09.2004 / Online-  
 Productinformation

**BALLUFF**